



Fig.: Order no. 41106

Single-sided stepladder with castors



Steps 80 mm

- Double-sided stepladder made of aluminium
- Stable rectangular tube side-rails
- 80 mm deep grooved steps and large platform
- 4-fold edged step-to-side-rail connection
- Conical side-rail guide for secure footing
- nivello® ladder shoes with patented 2-axis inclination technology
- Four self-locking spring-loaded castors (Ø 80 mm)
- 'safe-cap' ladder joint
- Rigid connection through metal struts detachable on both sides
- From seven steps or more: Spreader lock with two high-strength nylon straps
- Practical storage tray with integrated hooks and tool holders
- Step spacing: 235 mm
- Ladder inclination: 70°
- Maximum load: 150 kg



| Approx. max. working height in m | 2.7 | 2.95 | 3.15 | 3.4 | 3.65 | 3.85 | 4.1 | 4.35 | 4.8 | 5.3 |
|---|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Number of steps including platform | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 12 | 14 |
| Total height in m | 1.34 | 1.58 | 1.81 | 2.05 | 2.28 | 2.51 | 2.75 | 2.98 | 3.45 | 3.95 |
| Platform height in m | 0.68 | 0.91 | 1.14 | 1.38 | 1.61 | 1.85 | 2.08 | 2.31 | 2.78 | 3.28 |
| Base spread in m | 0.70 | 0.85 | 1.01 | 1.16 | 1.32 | 1.48 | 1.63 | 1.79 | 2.10 | 2.40 |
| Lower outer width in m | 0.62 | 0.65 | 0.68 | 0.70 | 0.74 | 0.77 | 0.80 | 0.83 | 0.89 | 0.95 |
| Side-rail depth of the ascent/ support section in mm | 73/58 | 73/58 | 73/58 | 73/58 | 73/58 | 73/58 | 73/58 | 73/58 | 73/58 | 73/58 |
| Weight in kg | 8.5 | 9.5 | 10.5 | 11.5 | 12.7 | 15.0 | 15.5 | 17.0 | 19.0 | 22.5 |
| Order no. | 41103 | 41104 | 41105 | 41106 | 41107 | 41108 | 41109 | 41110 | 41112 | 41114 |

Safety. Made in Germany.

nivello®
ladder shoes'safe-cap'
ladder joint4-fold edged
step-to-side-rail
connectionDetails on the relevant product page at www.steigtechnik.de

Suitable accessories

Wall-mounted
ladder holder L
Order no. 19839

Find out more from page 110 onwards

Single-sided ML stepladder

80 mm
stepsProduct benefits video
www.steigtechnik.de/videos

- Double-sided stepladder made of aluminium
- Ergonomically shaped ladder side-rails for easy handling
- 80 mm deep grooved steps and large platform
- High-strength bolted step-to-side-rail connection
- Conical side-rail guide for secure footing
- 4-fold riveted ladder joint made of aluminium
- Non-slip ladder shoes
- Practical storage tray
- From six steps or more: Spreader lock with two high-strength nylon straps
- Step spacing: 235 mm
- Ladder inclination: 70°
- Maximum load: 150 kg

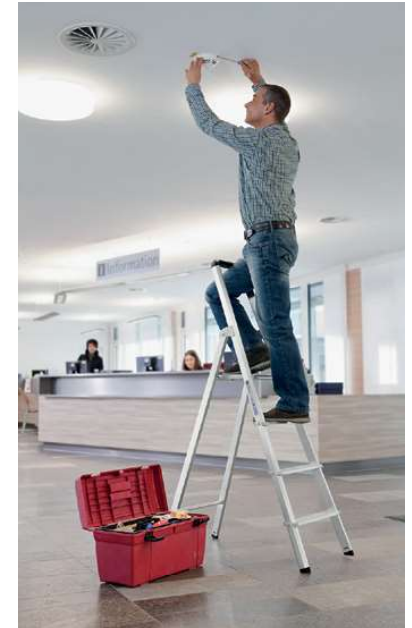


Fig.: Order no. 11224



| Material | Natural aluminium | Natural aluminium | Natural aluminium | Natural aluminium | Natural aluminium | Anodised aluminium | Anodised aluminium | Anodised aluminium |
|---|-------------------|-------------------|-------------------|-------------------|-------------------|--------------------|--------------------|--------------------|
| Approx. max. working height in m | 2.7 | 2.95 | 3.15 | 3.4 | 3.65 | 2.7 | 2.95 | 3.15 |
| Number of steps including platform | 3 | 4 | 5 | 6 | 7 | 3 | 4 | 5 |
| Total height in m | 1.31 | 1.54 | 1.78 | 2.01 | 2.25 | 1.31 | 1.54 | 1.78 |
| Platform height in m | 0.69 | 0.93 | 1.16 | 1.40 | 1.63 | 0.69 | 0.93 | 1.16 |
| Base spread in m | 0.68 | 0.84 | 1.00 | 1.15 | 1.31 | 0.68 | 0.84 | 1.00 |
| Lower outer width in m | 0.46 | 0.49 | 0.52 | 0.55 | 0.58 | 0.46 | 0.49 | 0.52 |
| Side-rail depth of the ascent/ support section in mm | 50/35 | 50/35 | 50/35 | 50/35 | 50/35 | 50/35 | 50/35 | 50/35 |
| Weight in kg | 5.0 | 6.0 | 7.0 | 8.5 | 9.5 | 4.5 | 6.0 | 7.0 |
| Order no. | 11223 | 11224 | 11225 | 11226 | 11227 | 11253 | 11254 | 11255 |

Safety. Made in Germany.

Non-slip
ladder shoes4-fold riveted
ladder jointHigh-strength bolted
step-to-side-rail
connectionDetails on the relevant product page at www.steigtechnik.de

Suitable accessories

Wall-mounted
ladder holder L
Order no. 19839

Find out more from page 110 onwards