



#### **Product description**



Video of product

- Aluminium work platform
- Sturdy, welded bar design
- 220 mm deep steps made of perforated aluminium cover with certified R 13 non-slip protection
- Top tread area: 550 x 300 mm
- Non-slip plastic shoes
- Available with and without handrail
- Maximum load: 150 kg

# Safety. Made in Germany. Welded tube Handrail Non-slip construction plastic shoes Details on the relevant product page at www.steigtechnik.de

#### Suitable accessories





Lifting castors Order no. 50041

Spring-loaded castors with arrester

More information from page 208 onwards

#### Front-end railing for work platform



- 600 mm high, sturdy railing
- For rigid work platforms
- Made of aluminium
- · Completely pre-assembled and easy to
- Only possible in connection with handrails on both sides
- Not for order no. 50031, 50008, 51030,
- 51031, 51018

Order no.	50046	

### Handrail bracket



- The safety of the work platform is improved with the handrail
- For rigid work platforms
- For an all-round railing two handrails art. no. 50040 and a front-end railing art. no. 50046 are required
- Not for order no. 50031, 50008, 51030, 51031, 51018

Order no.	50040	


## Work platform rigid R 13



Steps 220 mm



Step surface R 13 perforated aluminium cover

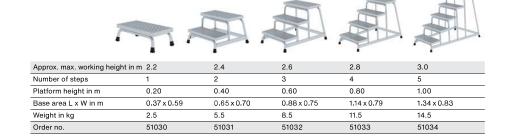

## Work platform rigid R 13 with handrail



Steps 220 mm



Step surface R 13 perforated aluminium cover



One-sided handrail (supplied separately)







Approx. max. working height in m	2.6	2.8	3.0	
Number of steps	3	4	5	
Platform height in m	0.60	0.80	1.00	
Total height in m	1.17	1.38	1.58	
Base area L x W in m	0.88 x 0.75	1.14 x 0.79	1.34 x 0.83	
Weight in kg	9.9	12.9	15.9	
Order no.	51036	51037	51038	

186 187