

Stairs, bridging steps

The individualists for safe access and exits

04



Inclination angle 45°
Inclination angle 60°



Fast delivery programme
10 working days

Stairs with design approval, manufactured in accordance with the series of European standards DIN EN ISO 14122. Cannot be used for domestic purposes in accordance with DIN 18065. Stairs, bridging steps and walkway systems are manufactured to order. They are therefore excluded from exchange.



Step surfaces

The respective design and non-slip class of the step and standing areas are marked with the following symbols.



Step surface R 9
Grooved aluminium



Step surface R 13
Aluminium grating



Step surface R 12
Steel grating



Step surface R 13
Perforated aluminium cover



Step surface R 13
Perforated steel cover





Step surface R 13
Corundum surface R 13
black or yellow

Safety. Made in Germany.

Designed and manufactured in Germany, you can feel our exacting standards in every detail of our products. For maximum safety. Day after day.

Find out more on page 8

04

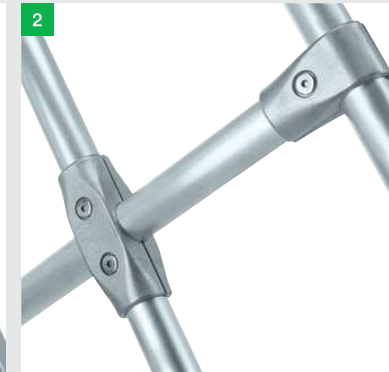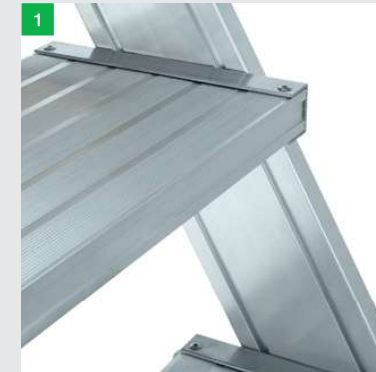

1. Wide range of surfaces and widths

A wide range of stair and platform designs are available

2. Everything under control

Rigid or push-fit handrails and railings for greater safety



3. High-strength materials

Corrosion-resistant fixtures and screw connections

4. The ultimate industrial quality

Stable and robust for tough everyday working life (including rectangular tube side-rails)

Top tread area

The total tread area depends on the platform length selected. This is made up of the platform length plus the depth of the last step, as these are mounted at the same height






Fig.: Order no. 600269

Your individual product in just a few clicks!

You can configure:

- Width, height
- Handrail design (e.g. push-fit)
- Stainless steel connecting parts
- Fastening options

www.steigtechnik.de/konfigurator

45° stairs

Inclination
angle
45°

Step surface
R 9

- Fixed aluminium stairs with inclination 45°
- Step widths: 600, 800 or 1,000 mm
- Step depth: 225 mm
- Standard step design in grooved aluminium (R 9), optionally also available with other surfaces (see overview on right)
- Handrail on one side, Ø 40 mm, with bolted connecting elements as standard (height: 1,100 mm)
- Second handrail optional (necessary in case of wall clearance > 120 mm in accordance with DIN EN ISO 14122-3)
- For stairs with a step width of 800 or 1,000 mm and a vertical height of 3,300 mm or more, a central support is required (at a surcharge or provided on site)
- Easy installation thanks to delivery in pre-assembled modules including assembly instructions
- Maximum load: Step load 150 kg, total load 300 kg

	Number of steps	4	5	6	7	8	9
	A Total height in mm	1,930	2,140	2,350	2,560	2,770	2,970
	B Vertical height in mm	830	1,040	1,250	1,460	1,670	1,870
	C Base area in mm	1,058	1,297	1,499	1,711	1,924	2,136
Step width 600 mm	Order no.	600244	600245	600246	600247	600248	600249
Step width 800 mm	Order no.	600264	600265	600266	600267	600268	600269
Step width 1,000 mm	Order no.	600344	600345	600346	600347	600348	600349
Second handrail at an extra charge	Order no.	600304	600305	600306	600307	600308	600309

Optional step surfaces configurable and on request

	Step depth in mm	Step width in mm
	Step surface R 12 steel grating	225
		600
		800
	Step surface R 13 anodised aluminium grating	225
		600
		800
	Step surface R 13 perforated steel cover	225
		600
		800
	Step surface R 13 perforated aluminium cover	225
		600
		800
	Step surface R 13 corundum surface R 13 black or yellow	225
		600
		800

Step depth can differ according to the standard and design

Accessories



Foot bracket for floor-mounted installation
Order no. 600125

More information from page 252 onwards

10	11	12	13	14	15	16	17	18
3,180	3,390	3,600	3,800	4,010	4,220	4,430	4,640	4,850
2,080	2,290	2,500	2,700	2,910	3,120	3,330	3,540	3,750
2,341	2,553	2,761	2,970	3,179	3,391	3,601	3,813	4,063
600250	600251	600252	600253	600254	600255	600256	600257	600258
600270	600271	600272	600273	600274	600275	600276	600277	600278
600350	600351	600352	600353	600354	600355	600356	600357	600358
600310	600311	600312	600313	600314	600315	600316	600317	600318



Fig.: Order no. 600229



Your individual product in just a few clicks!

You can configure:

- Width, height
- Handrail design (e.g. push-fit)
- Stainless steel connecting parts
- Fastening options

www.steigtechnik.de/konfigurator

60° stairs




Inclination
angle
60°



Step surface
R 9

- Fixed aluminium stairs with inclination 60°
- Step widths: 600, 800 or 1,000 mm
- Step depth: 225 mm
- Standard step design in grooved aluminium (R 9), optionally also available with other surfaces (see overview on right)
- Handrail on one side, Ø 40 mm, with bolted connecting elements as standard (height: 1,100 mm)
- Second handrail in accordance with DIN EN ISO 14122-3 required and available at a surcharge
- An intermediate platform is required for stairs with a vertical height of 3,000 mm or more (at a surcharge)
- Easy installation thanks to delivery in pre-assembled modules including assembly instructions
- Maximum load: Step load 150 kg, total load 300 kg



	Number of steps	4	5	6	7	8	9
A Total height in mm		2,070	2,310	2,550	2,790	3,040	3,280
B Vertical height in mm		970	1,210	1,450	1,690	1,940	2,180
C Base area in mm		811	941	1,096	1,226	1,361	1,491
Step width 600 mm	Order no.	600204	600205	600206	600207	600208	600209
Step width 800 mm	Order no.	600224	600225	600226	600227	600228	600229
Step width 1,000 mm	Order no.	600324	600325	600326	600327	600328	600329
Second handrail at an extra charge	Order no.	600284	600285	600286	600287	600288	600289

Optional step surfaces configurable and on request

	Step depth in mm	Step width in mm
Step surface R 12 steel grating	225	600 800 1,000
Step surface R 13 anodised aluminium grating	225	600 800 1,000
Step surface R 13 perforated steel cover	225	600 800 1,000
Step surface R 13 perforated aluminium cover	225	600 800 1,000
Step surface R 13 corundum surface R 13 black or yellow	225	600 800 1,000

Step depth can differ according to the standard and design

Accessories



Foot bracket for floor-mounted installation

Order no. 600125

More information from page 252 onwards

10	11	12	13	14	15	16
3,520	3,760	4,000	4,250	4,500	4,740	4,980
2,420	2,660	2,900	3,150	3,400	3,640	3,880
1,626	1,756	1,891	2,026	2,161	2,291	2,476
600210	600211	600212	600213	600214	600215	600216
600230	600231	600232	600233	600234	600235	600236
600330	600331	600332	600333	600334	600335	600336
600290	600291	600292	600293	600294	600295	600296